
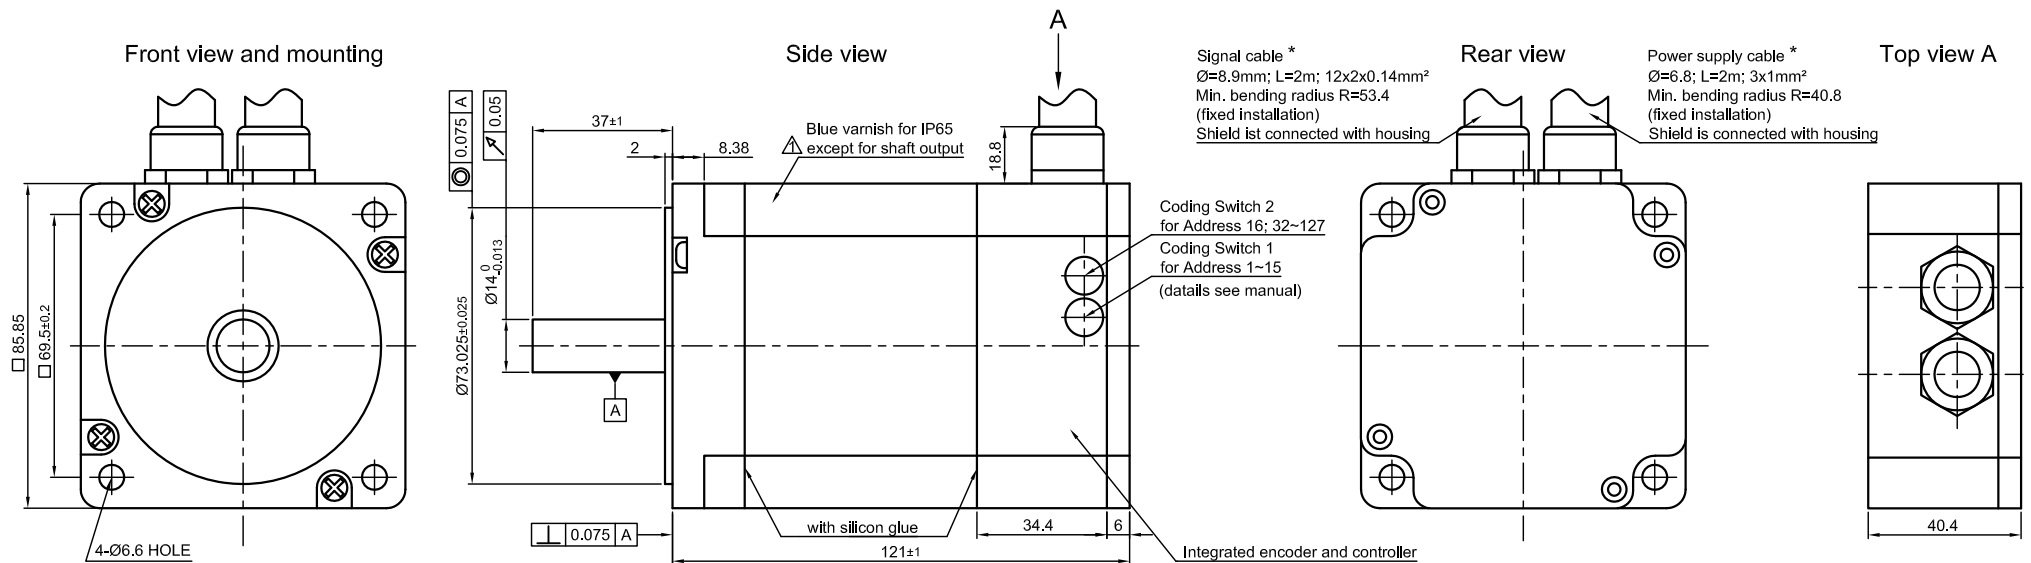
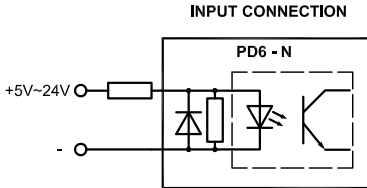
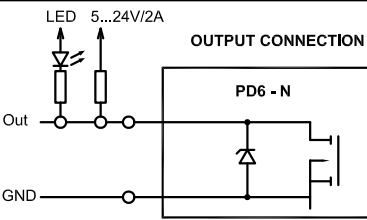


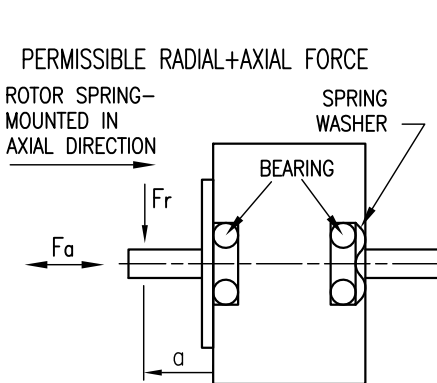

SPECIFICATION		CONNECTION	BIPOLAR PARALLEL	
SUPPLY VOLTAGE (VDC)		24 to 48		
AMPS/PHASE		* adj. to 11A (rated 7A)		
HOLDING TORQUE (Nm) [lb-in]		5.94 [52.57]		
DETENT TORQUE (Nm) [lb-in]		0.11 [0.974]		
STEP ANGLE (°) ± ACCURACY		* 1.8 to Microstep		
WEIGHT (Kg) [lb]		3.4 [7.5]		
* adjustable with Nanopro.				
OVERTEMPERATURE PROTECTION (ELECTRONICS): 80°C				
				
AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F]		PERMISSIBLE RADIAL+AXIAL FORCE		
INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)				
INSULATION (MOTOR) CLASS B 130° [266°F]		AXIAL-FORCE Fa (N)		
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		Fr=65		
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)		DISTANCE a (mm)		
		RADIAL-FORCE Fr (N)		
		AXIAL		
		RADIAL		
		SHAFT PLAY (mm)		
		AT LOAD MAX: (N)		
		10		
		5		
		APVD		
		S.Ha.		
		13.07.09		
		CHKD		
		DRN		
		J.W.		
		13.07.09		
		SIGNATURE		
		DATE		
		DWG.NO		
		PD6-N8918M9504		
		RESTRICTION SUPPLEMENTED		
		18.02.10		
		J.W.		
		APVD		
		PD6-N8918M9504		
		SCALE FREE		
		X ±0.5		
		1PL ±0.2		
		2PL ±0.1		
		ANGLE ±30°		
		APVD		
		S.Ha.		
		13.07.09		
		CHKD		
		DRN		
		J.W.		
		13.07.09		
		SIGNATURE		
		DATE		
		DWG.NO		
		PD6-N8918M9504		
		RESTRICTION SUPPLEMENTED		
		18.02.10		
		J.W.		
		APVD		
		PD6-N8918M9504		