


	Parameter	Remarks	Sym	Unit	TL6		TL9		TL12		TL15		TL18		TL24	
					N	S	N	S	N	S	N	S	N	S	N	S
Performance	Winding type				N	S	N	S	N	S	N	S	N	S	N	S
	Motortype, max voltage ph-ph				3-phase synchronous Iron core, 600V _{dc}											
	Ultimate Force @ 10°C/s	magnet @ 25°C	F _u	N	450	675	900	1125	1350	1800						
	Peak Force @ 6°C/s	magnet @ 25°C	F _p	N	400	600	800	1000	1200	1600						
	Continuous Force Watercooled	coils @ 100°C	F _{cw}	N	210	315	420	525	630	840						
	Continuous Force Aircooled*	coils @ 100°C	F _c	N	200	300	400	500	600	800						
	Maximum Speed**	@ 560 V	V _{max}	m/s	3.5	7	4	7	3.5	7	3.5	7	3.5	7	3.5	7
	Motor Force Constant	motor @ 25°C	K	N/A _{rms}	93	46.5	140	46.5	93	46.5	112	46.5	93	44.9	93	46.5
Motor Constant		S	N ² /W	380	570	760	950	1140	1520							
Electrical	Ultimate Current	magnet @ 25°C	I _u	A _{rms}	6.5	13.1	6.5	19.6	13.1	26.2	13.5	32.7	19.6	41	26.2	52
	Peak Current	magnet @ 25°C	I _p	A _{rms}	5.0	10.0	5.0	15.0	10.0	20.0	10.4	25.0	15.0	31.0	20.0	40.0
	Continuous Current Watercooled	coils @ 100°C	I _{cw}	A _{rms}	2.26	4.5	2.26	6.8	4.5	9.0	4.7	11.3	6.8	14.0	9.0	18.1
	Back EMF Phase-Phase _{peak}		B _{emf}	V / m/s	76	38	114	38	76	38	92	38	76	38	76	38
	Resistance per Phase	coils @ 25°C ex. cable	R _f	Ω	7.2	1.80	10.8	1.21	3.6	0.90	4.3	0.72	2.41	0.59	1.81	0.46
	Induction per Phase	l < 0.6 lp	L _f	mH	54	14	81	9.0	27	7.0	32	5.4	18	4.4	14	3.4
	Electrical Time Constant	coils @ 25°C	τ _e	ms	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
Thermal	Maximum Continuous Power Loss	all coils	P _c	W	150	225	300	375	450	600						
	Thermal Resistance		R _{th}	°C/W	0.48	0.32	0.24	0.19	0.16	0.12						
	Thermal Time Constant	minimum	τ _{th}	s	77	77	77	77	77	77						
	Watercooling Flow	for ΔT=3K	Φ _w	l/min	0.7	1.1	1.4	1.8	2.2	2.9						
	Watercooling Pressure-drop	indication	ΔP _w	bar	1	1	2	2	2	3						
Mechanical	Temperature Sensors				PTC 1kΩ and KTY21-6											
	Coil Unit Weight	ex. cables	M	kg	1.5	2.0	2.6	3.2	3.8	5.2						
	Coil Unit Length	ex. cables	L	mm	146	194	244	290	336	468						
	Motor Attraction Force	rms	F _a	N	950	1325	1700	2075	2450	3400						
	Magnet Pitch NN		τ	mm	24	24	24	24	24	24						
	Cable Weight		m	gr/m	180	180	180	180	180	300						
	Cable Type (Power)	length 1 m	d	mm (AWG)	9.6 (18)						11.9 (14)					
Cable Type (Sensor)	length 1 m	d	mm (AWG)	4.3 (26)						4.3 (26)						

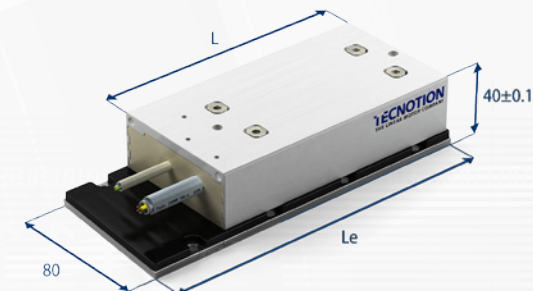

TL6 on 192mm magnet plate shown

Water cooling

All TL motors feature integrated cooling channels that allow for the easy setup of a liquid cooled system, at no additional cost.

Magnet plate dimensions

Le (mm)	192	288
M5 bolts	8	12
Mass (kg/m)	3.8	

Magnet plates can be butted together.


All specifications ±10%

*Max. continuous force depends on the thermal resistance, cooling surface and ambient temperature of your application. Download our simulation tool to check the motor's thermal behavior in the application.

** Actual values depend on bus voltage. Please check the F/V diagram in our simulation tool.

Mounting instructions and flatness or parallelism requirements can be found in the Iron Core installation manual. CAD files and 3D models can be downloaded from our website.

MAGNET PLATES

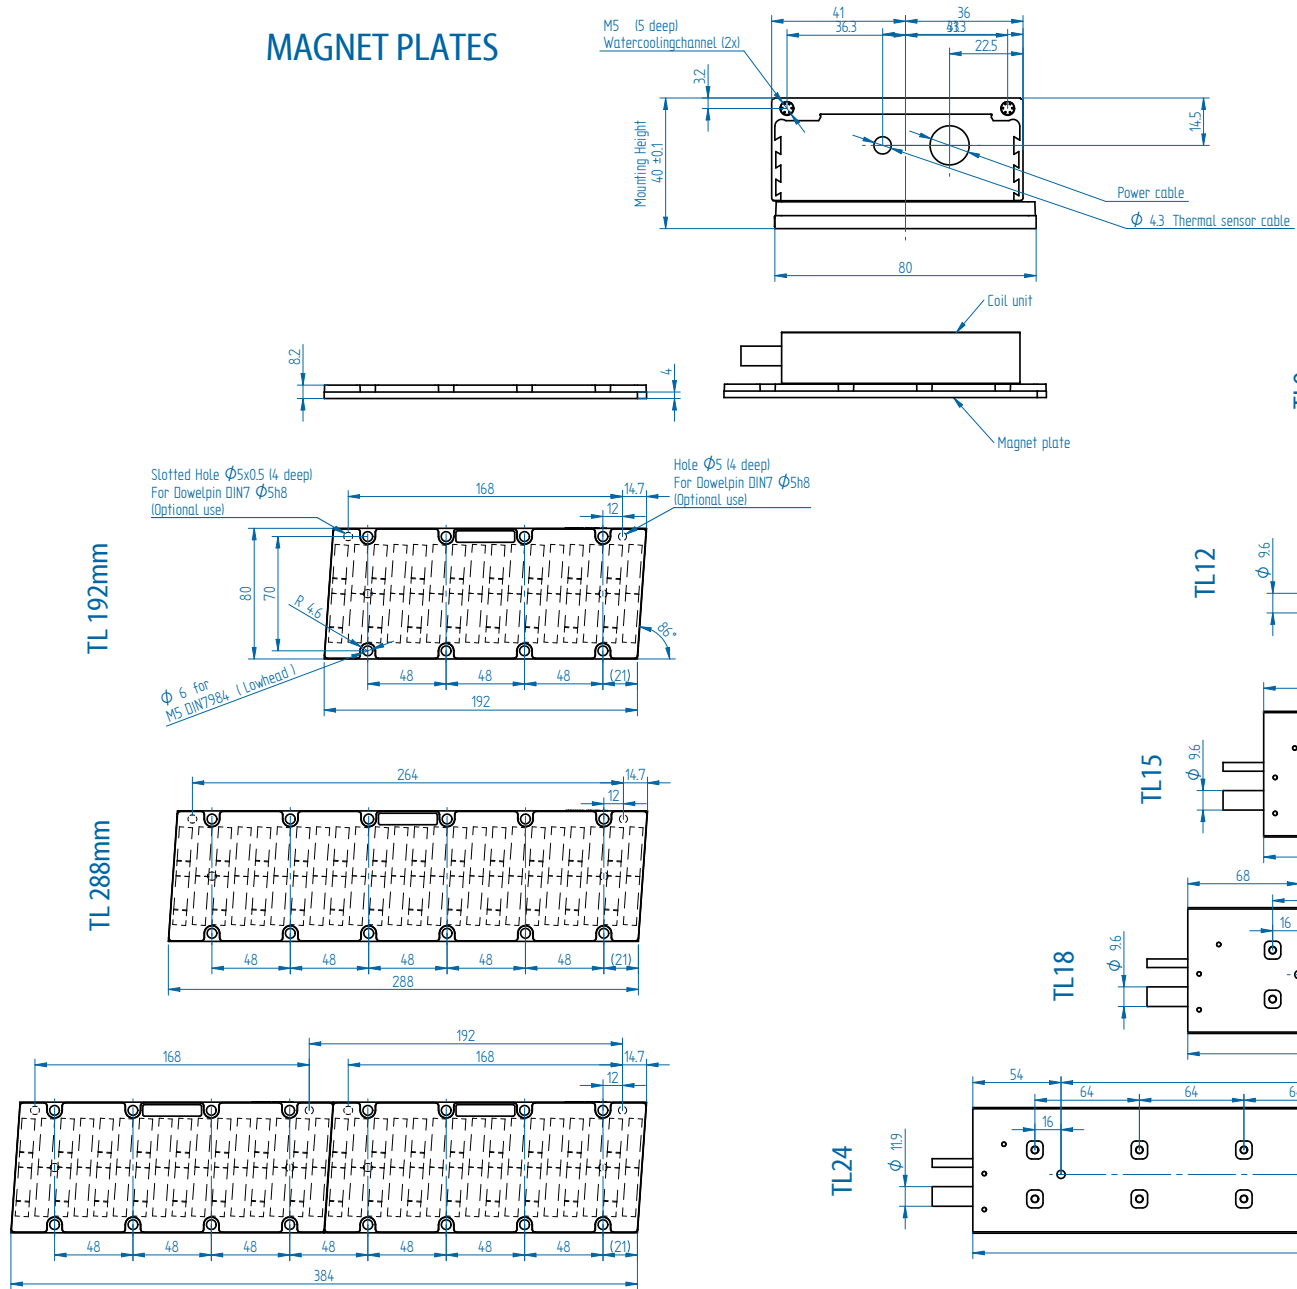

COILUNITS

