

intelligence

# PUPITRES OPERATEURS

## DOP - B

**m o t i o n**  
*la force de la gamme !*



**transtechnik**  
servomécanismes

## One Touch Give You Limitless Possibilities with HMI

Meet Customer Needs. Satisfy Various Applications. Provide Many Functions. Create Ultimate FA Equipment.

### Energy Saving and Environmental Automation

All models are equipped with LED backlights which provide energy-efficient lighting that is made without mercury, reduces energy use and CO2 emissions, and protects the environment.

### High Quality and Full-color Display

A full 65,536-color display is available on all models. With a whole new 2D drawing technique, the screen resolution is enhanced for more realistic images and for more colorful and vivid displays.

### A Wide Range of Options

Three serial communication interfaces (RS-232/RS-485/RS-422), USB disk, Ethernet, audio output, SD card and more are supported for various applications.

### Powerful Controller Drivers Support

Not just Delta industrial automation products, but more than 30 brands, and over 100 models of PLCs or controllers can be connected for effortless communication and versatile operation.



**Best Performance**



**Beautiful Display**



**Beneficial Features**


## B05 Standard

Model Name	Display Size	Display Type	Resolution	ROM	Ethernet	USB Host	USB Client	Memory Card	Audio Output
DOP-B05S100	5.6	65536 Colors TFT	320x234	4 MB	N/A	v1.1 * 1	v1.1 * 1	N/A	N/A
DOP-B05S101	5.6	65536 Colors TFT	320x234	8 MB	N/A	v1.1 * 1	v1.1 * 1	N/A	N/A




## B07 Standard Widescreen

Model Name	Display Size	Display Type	Resolution	ROM	Ethernet	USB Host	USB Client	Memory Card	Audio Output
DOP-B07S201	7	65536 Colors TFT	480x234	4 MB	N/A	v1.1 * 1	v1.1 * 1	N/A	N/A
DOP-B07S211	7	65536 Colors TFT	480x234	4 MB	N/A	v1.1 * 1	v1.1 * 1	N/A	N/A

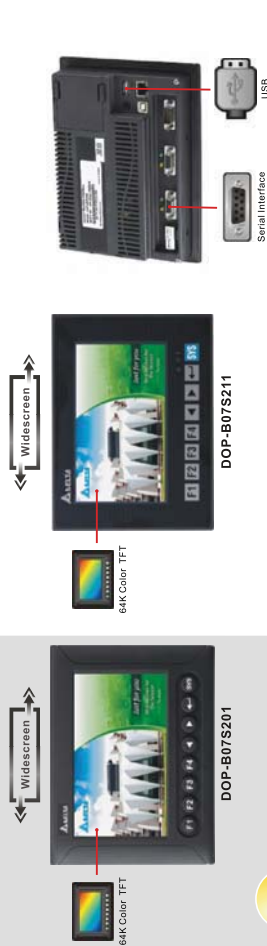


## B07 High Resolution Widescreen

Model Name	Display Size	Display Type	Resolution	ROM	Ethernet	USB Host	USB Client	Memory Card	Audio Output
DOP-B07S415	7	65536 Colors TFT	800x480	128MB	N/A	v1.1 * 1	v2.0 * 1	N/A	N/A
DOP-B07E415	7	65536 Colors TFT	800x480	128MB	10/100 Base-T	v1.1 * 1	v2.0 * 1	SD	YES

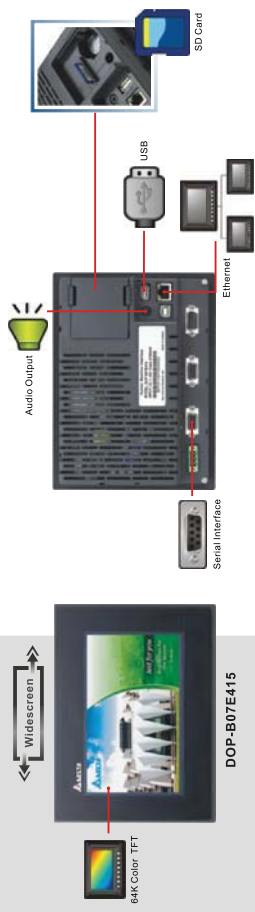


## B07 High Resolution

Model Name	Display Size	Display Type	Resolution	ROM	Ethernet	USB Host	USB Client	Memory Card	Audio Output
DOP-B07S515	7	65536 Colors TFT	800x600	128MB	N/A	v1.1 * 1	v2.0 * 1	N/A	N/A
DOP-B07E515	7	65536 Colors TFT	800x600	128MB	10/100 Base-T	v1.1 * 1	v2.0 * 1	SD	YES

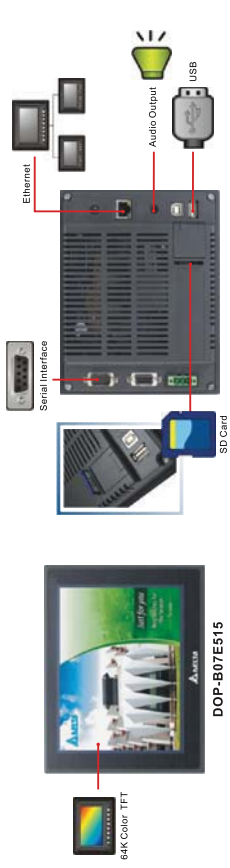


## B08 High Resolution

Model Name	Display Size	Display Type	Resolution	ROM	Ethernet	USB Host	USB Client	Memory Card	Audio Output
DOP-B08S515	8	65536 Colors TFT	800x600	128MB	N/A	v1.1 * 1	v2.0 * 1	N/A	N/A
DOP-B08E515	8	65536 Colors TFT	800x600	128MB	10/100 Base-T	v1.1 * 1	v2.0 * 1	SD	YES

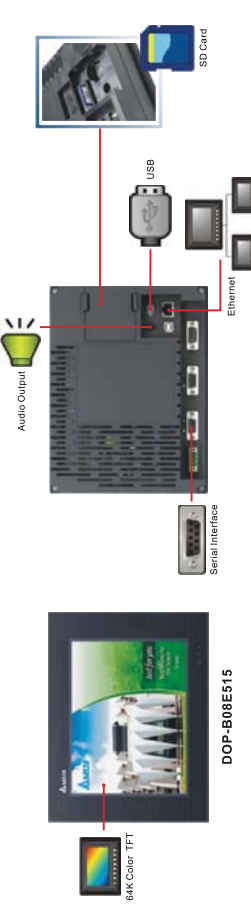

## B10 High Resolution Widescreen

Model Name	Display Size	Display Type	Resolution	ROM	Ethernet	USB Host	USB Client	Memory Card	Audio Output
DOP-B10S615	10	65536 Colors TFT	1024x600	128MB	N/A	v1.1 * 1	v2.0 * 1	N/A	N/A
DOP-B10E615	10	65536 Colors TFT	1024x600	128MB	10/100 Base-T	v1.1 * 1	v2.0 * 1	SD	YES

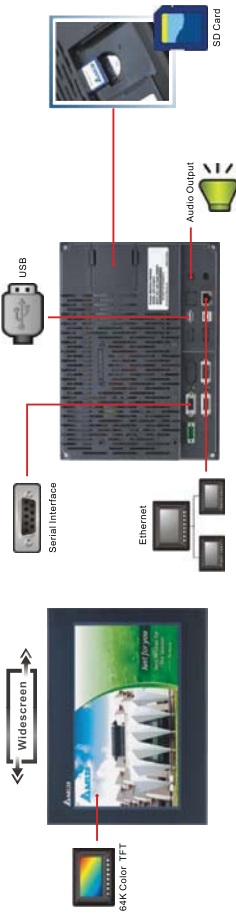

## High Quality Display



65,536-color high quality TFT display offers more realistic and vivid images to capture and visualize system and manufacturing processes more quickly.

## Audio Output Interface



Support built-in amplified speaker or 8Ω,5mm stereo mini jack

In case of errors, an alarm alerts users via an audio message in real time.

As the broadcast of alarms is triggered by the corresponding bit, the alarm messages can be played and output in different sound files through the setting value of word registers.



D100	Sound Files	Audio Messages
1	A.wav	Overcurrent
2	B.wav	Overvoltage
3	C.wav	Overload

## Supports Various Peripherals via USB Hub


### Slave (USB-type B)

Compatible with Windows Vista / Windows 7

Screen data can be transferred rapidly via USB connection.



Up to 480Mbps high-speed data transfer via USB v2.0




PLC Programming Software: WPLSet

### Master (USB-type A)

Various peripherals can be connected via USB Hub.

Using bypass function, it is possible to enable monitoring function and modify PLC programs directly via USB connection.

\*Support Delta DVP series PLC only.

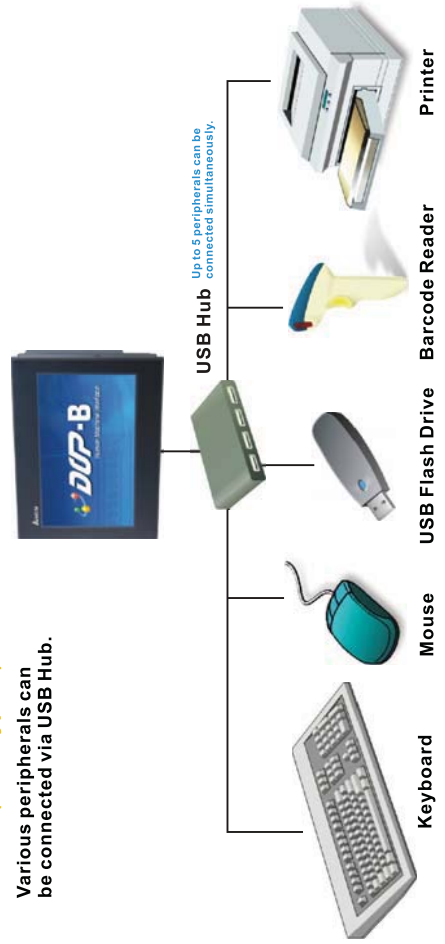

Support the printer that is compatible with PictBridge.

## SD Card / USB Disk

## Versatile Storage Interface

- Exploiting the convenience of SD card and USB disk, screen data transfer and collection can be quickly performed and the storage capacities of HMI can be easily increased as well. No need to worry about data capacity of excessive history and recipe data.
- SD card and USB disk are in FAT32 format, fully compatible with Microsoft Windows and allow filenames that exceed eight characters in length.



The recipe data can be saved in CSV format and easily edited on an external PC in Excel so as to save the memory of PLC effectively.



History and alarm information can also be saved in CSV format and stored to the SD card / USB disk.

- Multiple project screen data can be saved in SD card / USB disk simultaneously and transferred to HMI. No need to connect to PC.
- The data saved in SD card / USB disk can be encrypted and the number of copies can be limited to protect the programs from unauthorized use.




- PLC ladder diagrams can be transferred and backup via SD card / USB disk even in a location where an external PC is not available.
- SD card / USB disk are capable of storing several PLC ladder diagrams.



Support Delta DVP series PLC only.

## Multilingual Display

Up to 16 languages are available. No need to redesign the screen data! A benefit for marketing the equipment to manufacturers and end users around the world.

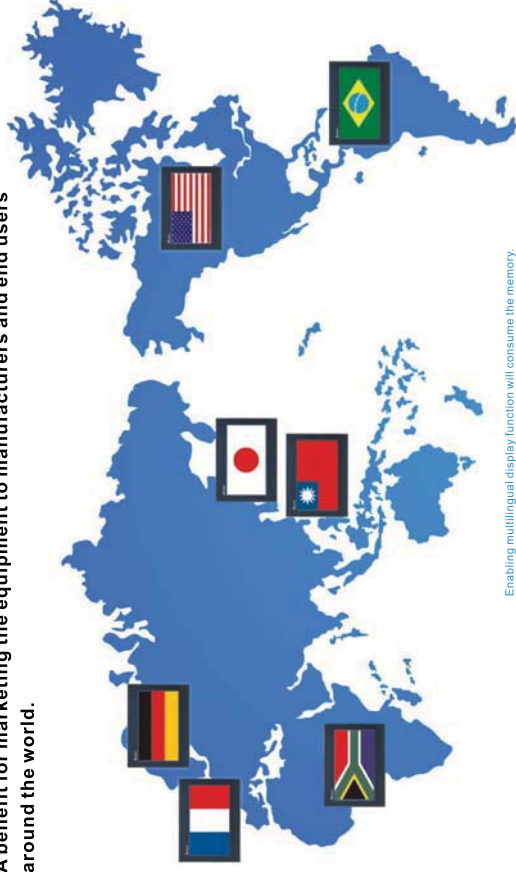

Enabling multilingual display function will consume the memory.


## Password Settings

Provide 8 levels of passwords to set user security to prevent improper use. Only the security level that is equal to or higher than the current setting can use the element.




## Element Invisible Function

The element on the screen can be hidden by triggering the corresponding bit.

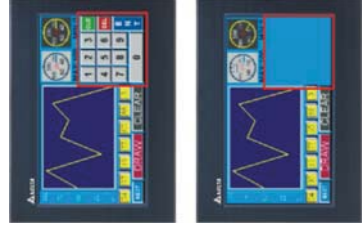

## Ethernet Ubiquitous High Speed Communication

### Ethernet Upload and Download

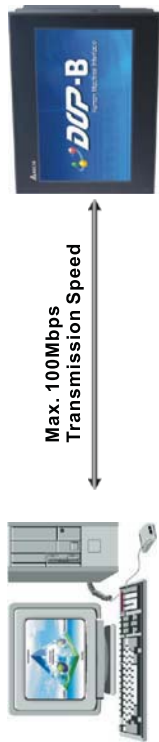


Easy to maintain and upgrade programs no matter where you are in the world.

## Provide Diverse Communication Interfaces

### Easy to communicate with more than 30 brands of PLCs/Controllers


All DOP-B series models support RS-232/485/422 communication interfaces and over 20 different PLC/Controller drivers. With the aid of an Ethernet interface, it is possible to use four communication interfaces at the same time, easily connecting to various industrial automation devices for a complete communication network link managed by Delta's new DOP-B series.

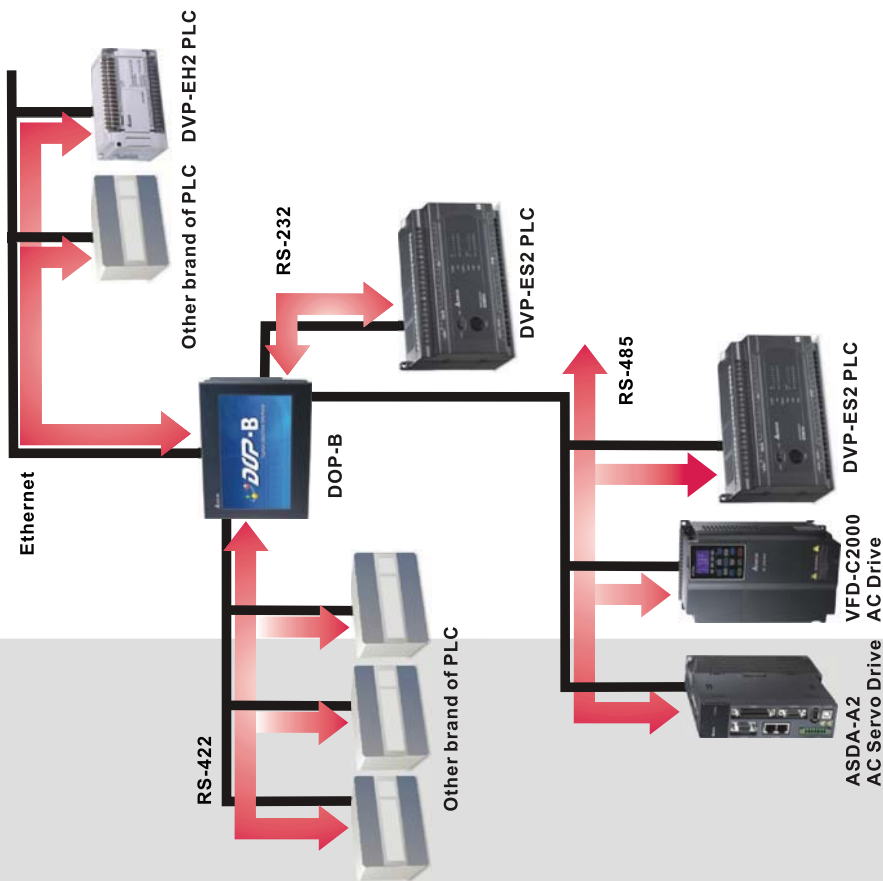

## Best Solution for Network Monitoring


Using an Ethernet connection can easily establish an N:N communication link and create the desired communication network according to different application requirements.

The DOP-B series HMI can use the IFD9506 Ethernet communication module, which is able to switch Ethernet and RS-485 interfaces quickly, to connect Delta's AC servo drive, AC motor drive, temperature controller and other industrial automation products via the Ethernet and control the entire network for a complete and ultimate network monitoring solution.

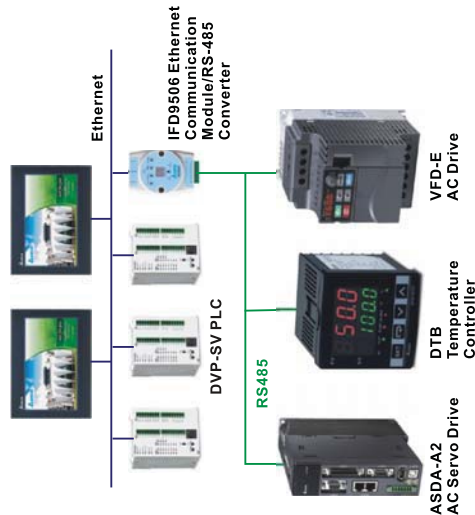

## Screen Editor 2.00

The all new and upgraded configuration software provides complete functions and a user-friendly operator interface. Make the editing easier than ever with a whole new level of design.

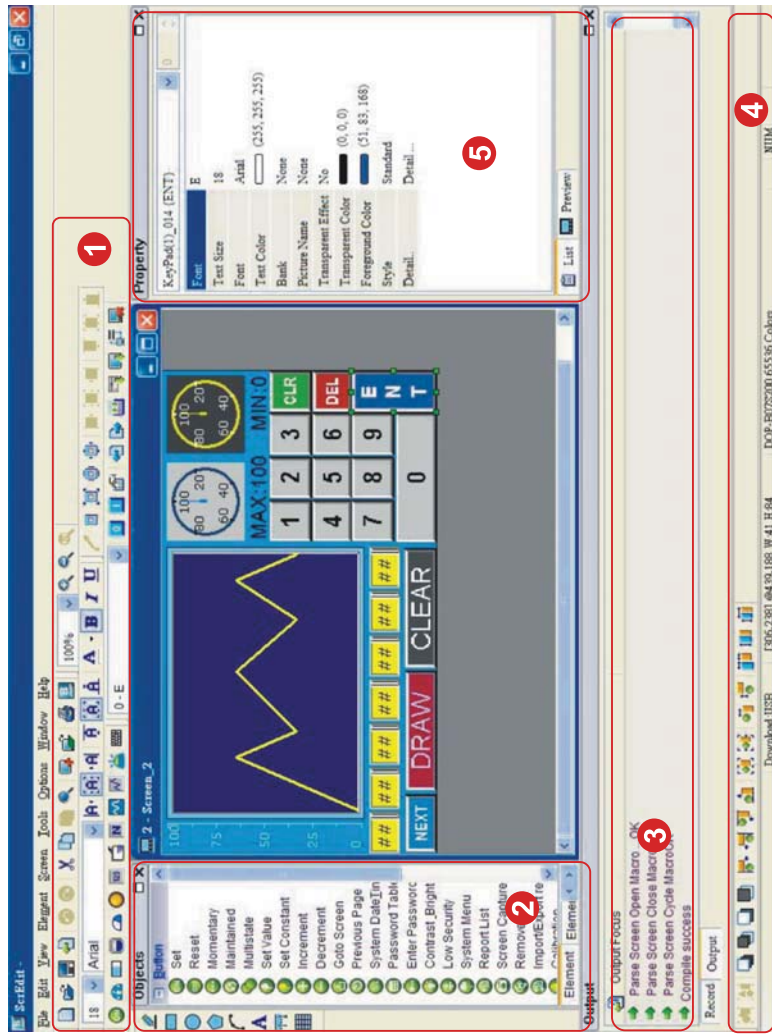

### 1 Toolbar

Actions such as edit, save, upload and compile can be executed easily just by clicking the attractive easy-to-see icons on the toolbar.

### 2 Element Tool Window

The Element Tool window provides a wide variety of element icons for selection. Use the mouse to select the desired element icon and drag it onto the work place to create a new element.

### 3 Output Window

The Output Window displays all the editing actions and output messages when the compile function is enabled. Once an error occurs, the error messages are displayed in Output Window as well.

### 4 Layout Toolbar

The Layout Toolbar offers Bring to Front, Send to Bottom, Align, Across/Down Space Evenly, Make Same Size and other functions for the benefit of creating intricate and beautiful elements.

### 5 Property Table

The Property Table displays the element property settings for each element.

## Convenient Screen Data Conversion

Compatible with the existing Screen Editor 1.05 for the DOP-A series HMI. The project file created by Screen Editor 1.05 can be opened by Screen Editor 2.00. It is therefore easy to upgrade and convert projects from DOP-A series HMI to DOP-B series HMI.



\* After the screen data is converted, it still needs to confirm the element position, text size and other settings.

## Minimum System Requirements of Screen Editor 2.00

Hardware / Software	System Requirements
CPU	Pentium III, 500MHz or greater is recommended
Memory	256MB and above is recommended
Hard Disk	Capacity: 400MB and above
Monitor	Support resolution: 800 x 600 or higher full-color display.
Printer	Printer compatible with Windows 2000 / Windows XP / Windows Vista / Windows 7
Operating System	Windows 2000 / Windows XP / Windows Vista / Windows 7

\* Users can download the Screen Editor configuration software and the user manual at Delta's website via the following link: <http://www.delta.com.tw/industrialautomation/>.

## Picture Bank

Newly designed picture bank offers more colorful and attractive elements.




## Solution for Constructing a Network between Office and Production Site via Ethernet

### eServer Data Collection Software

eServer lets you transfer production information and history data directly from production site to a PC in the office via Ethernet.

Daily Report				
Time	Data 1	Data 2	Data 3	Data 4
2009/4/22 AM 07:30	24	56	67	99
2009/4/22 AM 08:30	74	41	93	48
2009/4/22 AM 09:30	14	74	32	56
2009/4/22 AM 10:30	53	24	12	34
2009/4/22 AM 11:30	99	32	16	85
2009/4/22 AM 12:30	24	62	36	83
2009/4/22 PM 01:30	14	95	23	90

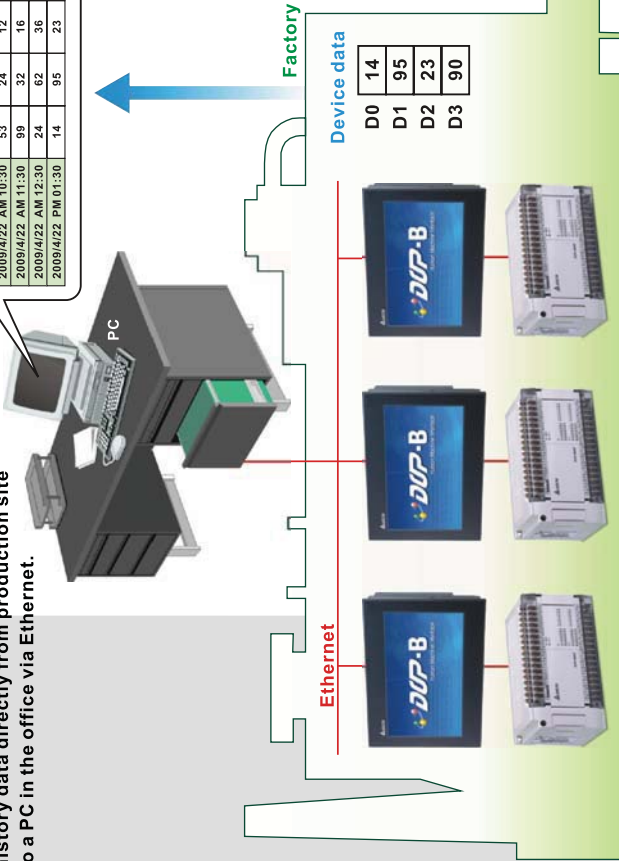

### 1) Excel Sampling Data

- Collected data can be saved in user-defined Excel files according to purpose and to easily create production reports.
- If the formulas in the Excel file are set in advance, the production data, i.e. defective rate, average working hours and capacity utilization rate, etc. can be calculated simultaneously while production data is recorded.
- Production data can be saved in daily reports, weekly reports and monthly reports, etc. automatically under different settings.

### 2) Database Sampling Data


- Users can access any database via ODBC interface.

### 3) Recipe Data Transfer

- Users can transfer and backup the recipe data via eServer easily.

### eRemote Remote Control Software

eRemote lets you view and check the same screen shown on the HMI at the production site, and control the manufacturing process via Ethernet. No matter where you are, remote control is easily accomplished.

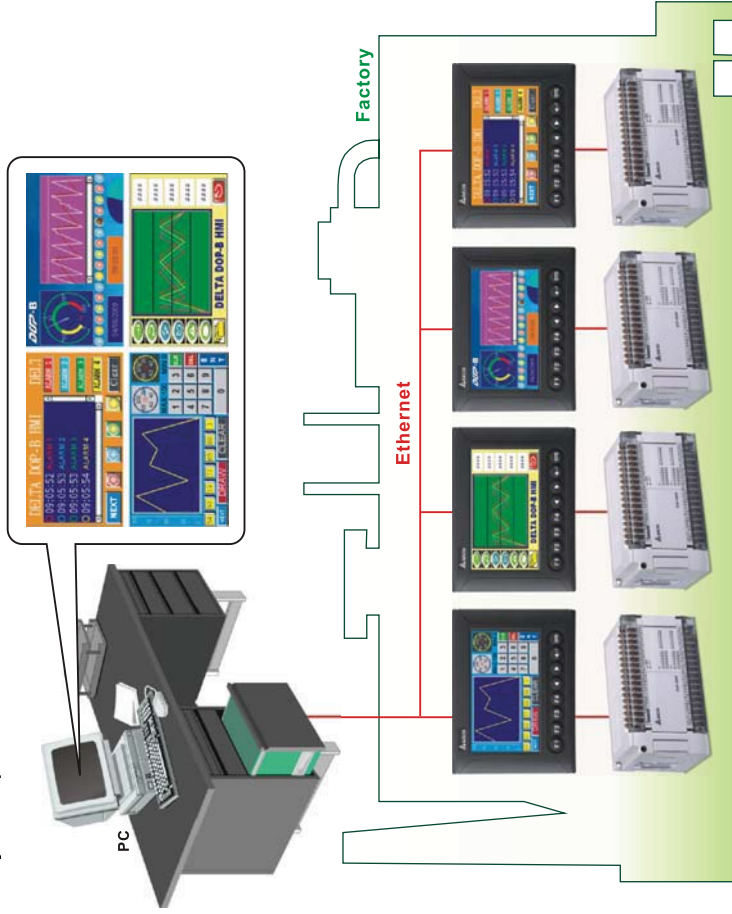

## Minimum System Requirements for DOP-eRemote / DOP-eServer


Hardware / Software	System Requirements
CPU	Pentium 4, 1.6GHz or greater is recommended
Memory	1G MB and above is recommended
Hard Disk	Capacity: 50MB and above
Monitor	Support resolution: 1024 x 768 or higher full-color display.
Printer	Printer compatible with Windows 2000 / Windows XP / Windows Vista / Windows 7
Operating System	Windows 2000 / Windows XP / Windows Vista / Windows 7

\*Users can download the DOP-eRemote / DOP-eServer software and the user manual at Delta's website via the following link:  
<http://www.delta.com.tw/industrialautomation/>


## Dimensions

Units: mm (inches)


- DOP-B05S100
- DOP-B05S101

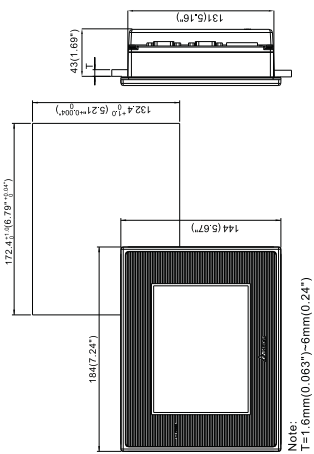

- DOP-B07S201




- DOP-B07S211

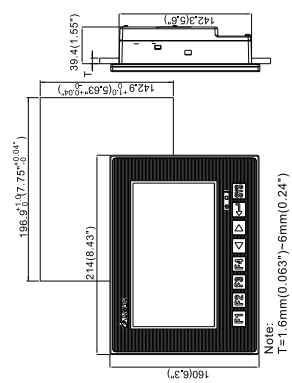


## Dimensions

Units: mm (inches)


- DOP-B07E415

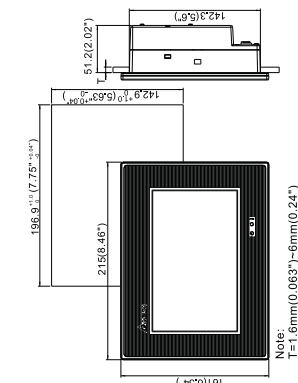


- DOP-B07E515

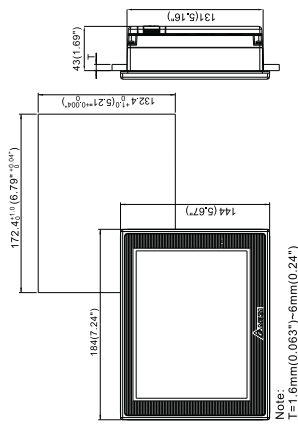

- DOP-B08E515

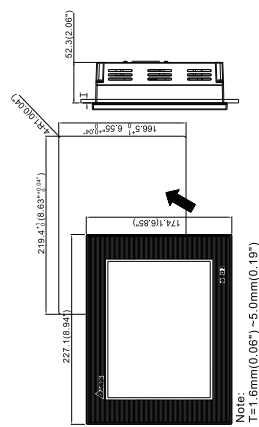

- DOP-B10E615

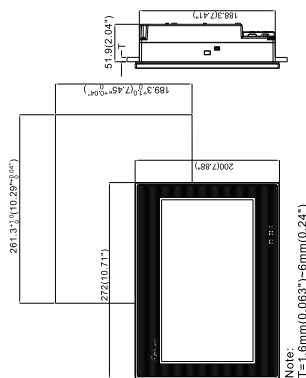

## Optional Accessories

Model Name	Explanation
DOP-CA232DP	DOP-CA232DP: RS-232 Communication Cable for DVP Series PLC (Female Socket)
DVPACAB2A30	DVPACAB2A30: RS-232 Communication Cable for DVP Series PLC (Male Socket)
DOP-CAUSBAB	DOP-CAUSBAB: USB Communication Cable

## Ordering Information

DOP - B 07 S 4 15



## Specifications

MODEL	DOP-B05S100	DOP-B05S104	DOP-B07S211	DOP-B07S415	DOP-B07E415
Display Type	5.6" TFT LCD (65536 colors)	7" WideScreen TFT LCD	7" WideScreen TFT LCD	7" TFT LCD (65536 colors)	7" TFT LCD (65536 colors)
Resolution	320 x 234 pixels	480 x 234 pixels	800 x 480 pixels	800 x 600 pixels	800 x 600 pixels
Backlight	LED Back Light	LED Back Light	LED Back Light	LED Back Light	LED Back Light
Display Size	113.28 x 84.70mm	154.08 x 86.58mm	152.4 x 91.44mm	141 x 105.75mm	141 x 105.75mm
Operating System	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS
MCU	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller
NOR Flash ROM	Flash ROM 4 MB (OS System: 2MB / User Application: 2MB)	Flash ROM 4 MB (OS System: 2MB / User Application: 2MB)	Flash ROM 4 MB (OS System: 2MB / User Application: 2MB)	Flash ROM 16MB / Backup: 16MB / User Application: 82MB	Flash ROM 128 MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)
SDRAM	8Mbytes	16Mbytes	64Mbytes	64Mbytes	64Mbytes
Backup Memory (Bytes)	128Kbytes	256Kbytes	16Mbytes	16Mbytes	16Mbytes
Buzzer Effect	N/A	N/A	N/A	N/A	N/A
AUX Output	N/A	N/A	N/A	N/A	N/A
Ethernet Interface	N/A	N/A	N/A	N/A	N/A
Memory Card	N/A	N/A	N/A	SD card (support SDHC)	SD card (support SDHC)
USB	1 USB Host (Ver 1.1 / 1 USB Client Ver 1.1)	1 USB Host (Ver 1.1 / 1 USB Client Ver 1.1)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)
COM1	RS-232 / RS-485	RS-232 / RS-422 / RS-485	RS-232 / RS-422	RS-232 / RS-422	RS-232 / RS-422
Serial COM Port	RS-232 / RS-485	RS-232 / RS-422 / RS-485	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)
COM3	RS-422 / RS-485	RS-232 / RS-422 / RS-485	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)
Function Key	N/A	N/A	User defined key x 4 + System key x 4	N/A	N/A
Perpetual Calendar (RTC)	Built-in	Built-in	Built-in	Built-in	Built-in
Cooling Method	Natural air circulation	Natural air circulation	Natural air circulation	Natural air circulation	Natural air circulation
Safety Approval	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)
Waterproof Degree	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4
Operation Voltage (Ver 5)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)
Voltage Endurance (Ver 5)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)
Power Consumption (Ver 5)	3.0W	3.0W	4.8W	4.8W	4.8W
Backup Battery	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1
Backup Battery Life	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C
Operation Temp	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C
Storage Temp	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C
Ambient Humidity	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2
Vibration Resistance	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times
Dimensions (W x (H) x (D) mm)	184 x 144 x 50	184 x 144 x 50	215 x 161 x 48	215 x 161 x 48	215 x 161 x 48
Panel Cutout (W) x (H) mm	172.4 x 132.4	172.4 x 132.4	196.9 x 142.9	196.9 x 142.9	196.9 x 142.9
Weight	Approx. 670g	Approx. 670g	Approx. 840g	Approx. 840g	Approx. 970g

1) The half-life of backlight is defined as original luminance being reduced by 50% when the maximum driving current is supplied to HMI.  
 2) USB Host can provide up to 5V/500mA of power.  
 3) The isolated power circuit can withstand a 1500V voltage peak for 1 minute.  
 4) Some models are in the process of application for UL and KCC certification. For more information, please consult our distributors.  
 5) The value of the power consumption indicates the electrical power consumed by HMI with no peripheral devices connected. To ensure normal operation, it is recommended using a power supply with a capacity 1.5~2 times the value of the power consumption.  
 6) Users can download the Screen Editor V2.00, the program editor of Delta HMI product and the user manual via the following link: <http://www.delta.com.tw/industrialautomation/>.  
 7) The content of this catalogue may be revised without prior notice. Please consult our distributors or download the most updated version at <http://www.delta.com.tw/industrialautomation/>.

MODEL	DOP-B07S515	DOP-B07E515	DOP-B08S515	DOP-B08E515	DOP-B10S615	DOP-B10E615
Display Type	7" TFT LCD (65536 colors)	800 x 600 pixels	8" TFT LCD (65536 colors)	10" WideScreen TFT LCD	10" WideScreen TFT LCD	10" WideScreen TFT LCD
Resolution	800 x 600 pixels	1024 x 600 pixels	1024 x 600 pixels	1024 x 600 pixels	1024 x 600 pixels	1024 x 600 pixels
Backlight	LED Back Light	LED Back Light	LED Back Light	LED Back Light	LED Back Light	LED Back Light
Display Size	141 x 105.75mm	162 x 121.5mm	162 x 121.5mm	226 x 128.7mm	226 x 128.7mm	226 x 128.7mm
Operating System	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS	Delta Real Time OS
MCU	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller	32-bit RISC Micro-controller
NOR Flash ROM	Flash ROM 128MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)	Flash ROM 128MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)	Flash ROM 128MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)	Flash ROM 128 MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)	Flash ROM 128 MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)	Flash ROM 128 MB (OS System: 30MB / Backup: 16MB / User Application: 82MB)
SDRAM	64Mbytes	64Mbytes	64Mbytes	64Mbytes	64Mbytes	64Mbytes
Backup Memory (Bytes)	16Mbytes	16Mbytes	16Mbytes	16Mbytes	16Mbytes	16Mbytes
Buzzer Effect	N/A	N/A	N/A	N/A	N/A	N/A
AUX Output	N/A	N/A	N/A	N/A	N/A	N/A
Ethernet Interface	N/A	N/A	N/A	N/A	N/A	N/A
Memory Card	SD card (support SDHC)	SD card (support SDHC)	SD card (support SDHC)	SD card (support SDHC)	SD card (support SDHC)	SD card (support SDHC)
USB	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)	1 USB Host (Ver 1.1 / 1 USB Client Ver 2.0)
COM1	RS-232 (supports hardware flow control)	RS-232 (supports hardware flow control)	RS-232 (supports hardware flow control)	RS-232 (supports hardware flow control)	RS-232 (supports hardware flow control)	RS-232 (supports hardware flow control)
Serial COM Port	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)
COM3	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)	RS-232 / RS-422 (has built-in isolated power circuit)
Function Key	N/A	N/A	N/A	N/A	N/A	N/A
Perpetual Calendar (RTC)	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in
Cooling Method	Natural air circulation	Natural air circulation	Natural air circulation	Natural air circulation	Natural air circulation	Natural air circulation
Safety Approval	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)	CE / UL (Ver 7 / KCC)
Waterproof Degree	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4	IP65 / NEMA4
Operation Voltage (Ver 5)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)	DC +24V (-10% ~ +15%) (please use isolated power supply)
Voltage Endurance (Ver 5)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)	AC500V for 1 minute (between charging DC24 terminal and FG terminals)
Power Consumption (Ver 5)	7.68W	7.68W	5.2W	7.8W	12W	12W
Backup Battery	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1	3V lithium battery CR2032 x 1
Backup Battery Life	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C
Operation Temp	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C
Storage Temp	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C
Ambient Humidity	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2	10% ~ 90% RH [ 0 ~ 40°C ] , 10% ~ 55% RH [ 41 ~ 50°C ] , Pollution Degree 2
Vibration Resistance	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times	IEC 61131-2 Compliant 5Hz~f<9Hz = Continuous; 1.75mm / Occasional; 3.5mm 9Hz~f<150Hz = Continuous; 0.5g / Occasional; 1.0g X, Y, Z directions for 10 times
Dimensions (W x (H) x (D) mm)	184 x 144 x 50	184 x 144 x 50	227.1 x 174.1 x 61	227.1 x 174.1 x 61	272 x 200 x 61	272 x 200 x 61
Panel Cutout (W) x (H) mm	172.4 x 132.4	172.4 x 132.4	219.4 x 166.5	219.4 x 166.5	261.3 x 189.3	261.3 x 189.3
Weight	Approx. 800g	Approx. 800g	Approx. 1228g	Approx. 1228g	Approx. 1520g	Approx. 1520g

1) The half-life of backlight is defined as original luminance being reduced by 50% when the maximum driving current is supplied to HMI.  
 2) USB Host can provide up to 5V/500mA of power.  
 3) The isolated power circuit can withstand a 1500V voltage peak for 1 minute.  
 4) Some models are in the process of application for UL and KCC certification. For more information, please consult our distributors.  
 5) The value of the power consumption indicates the electrical power consumed by HMI with no peripheral devices connected. To ensure normal operation, it is recommended using a power supply with a capacity 1.5~2 times the value of the power consumption.  
 6) Users can download the Screen Editor V2.00, the program editor of Delta HMI product and the user manual via the following link: <http://www.delta.com.tw/industrialautomation/>.  
 7) The content of this catalogue may be revised without prior notice. Please consult our distributors or download the most updated version at <http://www.delta.com.tw/industrialautomation/>.



■ **Siège social & service technique:**

■ Bureau Lyon

Z.A Ahuy-Suzon  
17, Rue des grandes Varennes  
BP. 46  
21121 AHUY  
Tél : 03 80 55 00 00  
Fax: 03 80 53 93 63

Une équipe technique et commerciale à votre service :



- Définitions et calculs, projets sur cahier des charges
- Interventions et assistances à la mise en route
- Réparations, service après vente
- Formations, agrément N° 26.21.01504.21

*infos@transtechnik.fr*  
**www.transtechnik.fr**